



DT12 Rec'd PCT/PTO U-9 DEC 2004



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I further certify that attached hereto is a true copy of the entries made to date in the Register of Patents in respect of the patent.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., c, P.L.C. or PLC.


Registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 28 October 2004

*R. Mahoney*

CERTIFIED COPY OF  
PRIORITY DOCUMENT

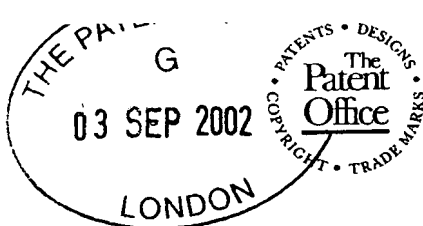

# Statement of inventorship and of right to grant of a patent

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference 24/P32645GB

2. Patent application number  
(if you know it)

0220463.4

03 SEP 2002

3. Full name of the or of each applicant VODAFONE GROUP PLC

4. Title of the invention NETWORKS

5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent BY VIRTUE OF EMPLOYMENT AND/OR ASSIGNMENT

6. How many, if any, additional Patents Forms 7/77 are attached to this form? NONE  
(see note (c))

7. I/We believe that the person(s) named over the page (and on any extra copies of this form) is/are the inventor(s) of the invention which the above patent application relates to.

Signature  
MATHISEN, MACARA & CO

Date  
3 September 2002

8. Name and daytime telephone number of person to contact in the United Kingdom MARK C FOSTER 01895 678331

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- Once you have filled in the form you must remember to sign and date it.

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

GURLEYEN, Bulent Ozgur

35 Greys Court  
Sidmouth Street  
Reading  
Berkshire  
RG1 4PP

Patents ADP number (if you know it): 08402398001

CHANRASIRI, Pubudu Priyanjaya


34 Richmond Avenue  
Thatcham  
Berkshire  
RG19 3UG

Patents ADP number (if you know it): 08268484002

Reminder

Have you signed the form?

Patents ADP number (if you know it):

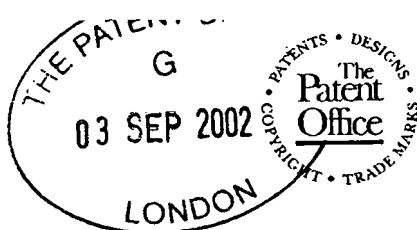

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference 24/P32645GB

2. Patent application number  
(The Patent Office will fill in this part)

0220463.4

03 SEP 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

VODAFONE GROUP PLC  
THE COURTYARD  
2-4 LONDON ROAD, NEWBURY  
BERKSHIRE  
RG14 1JX, U.K.

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

815471 8001  
UNITED KINGDOM

4. Title of the invention  
NETWORKS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

MATHISEN, MACARA & CO  
The Coach House  
6-8 Swakeleys Road  
Ickenham, Uxbridge  
UB10 8BZ

Patents ADP number (if you know it)

1073001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
UK	0213609.1	13 June 2002

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:


YES

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

## Continuation sheets of this form

Description	21
Claim(s)	5
Abstract	1
Drawing(s)	7 + 7 

10. If you are also filing any of the following, state how many against each item.

### Priority documents

#### Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) 1

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature  
Mathisen, Macara & CO

Date  
3 September 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

MARK C FOSTER

01895 678331

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

FV1:020903

NETWORKS

5 The present invention relates to a network including a plurality of devices, each device being capable of wireless communication with the other devices of the network, and to a method allowing selected devices within a network to be associated within a domain.

10 According to the present invention, there is provided a network including a plurality of devices, each device being capable of wireless communication with the other devices of the network, and wherein one of the devices includes administration means for allowing selected devices to be associated within a domain by providing each device with identification data, the identification data  
15 of each device being interpretable by each other device within the domain, particular modes of communication only being allowed between devices within the domain having such identification data.

According to another aspect of the present invention, there is provided a method  
20 allowing selected devices within a network to be associated within a domain, each device being capable of wireless communication with the other devices of the domain, the method including adapting one device within the domain to provide each other device with identification data, the identification data of each

device being interpretable by each other device within the domain, particular modes of communication only being allowed between devices within the domain having such identification data.

- 5 For a better understanding of the present invention, embodiments will now be described by way of example, with reference to the accompanying drawings, in which:

Figure 1 shows a personal area network (PAN) including a plurality of devices  
10 belonging to one user;

Figure 2 shows a personal area network (PAN) having two PAN Security Domains (PSDs) formed therein in accordance with the invention;

- 15 Figure 3 shows the formation of a further PSD in the PAN of Figure 2;

Figure 4 shows the exchange of data between devices within a PSD;

- Figure 5 shows a PSD, including the structure necessary for resource sharing  
20 within the PSD;

Figure 6 shows in more detail the structure for resource sharing within a device of a PSD; and

Figure 7 shows the interaction between two devices within a PSD between which resource sharing is to occur.

- 5 Figure 1 shows a personal area network (PAN) 1 including a plurality of devices belonging to one user. Within the PAN 1 it is desired that all the individual devices can communicate and share resources with other devices of the same user in seamless fashion. From a security standpoint, this requires individual devices to identify other devices owned by the same user when offering or  
10 requesting services. Further, in order to protect data confidentiality, individual devices should be able to communicate securely with each other. Depending on the number of devices within the PAN 1 and the services they offer, this can become very complicated. This problem is further complicated because the number of devices will be changing with time as devices join and leave the PAN  
15 1.

A PAN is different from a conventional network in that communication between devices is not through a server.

- 20 If such a multitude of devices in a PAN are expected to have coherent behaviour, all devices should be able to fit into a distributed terminal architecture capable of taking into consideration the ownership and privileges required for individual devices to operate.



In Figure 1 the devices in the personal area network 1 comprise a GPRS mobile telephone 3, laptop computer 5 and personal digital assistant (PDA) device 7. As indicated by the arrows, each of the devices 3, 5, 7 is capable of communicating with the other devices within the PAN 1. In this example each of the devices 3, 5, 7 is a Bluetooth device, allowing the devices 3, 5, 7 to be inter-operable. Data communication between the devices 3, 5, and 7 may be by infrared communication, radio communication or by any other wireless means.

For example, the PDA 7 will connect to the mobile telephone 3 to access the Internet and to the laptop computer 5 to synchronise the user's calendar or to exchange files for other reasons.

Conventionally, each pair of devices 3, 5 and 7 must be separately configured to communicate with each other. This will require three separate configuration processes, for example between the laptop 5 and the PDA 7, the laptop 5 and the mobile telephone 3 and the mobile telephone 3 and the PDA 7. After an initial configuration processes the devices 3, 5, 7 may communicate with one another, although typically this will require the user to manually select a communication mode on each of two devices to communicate with one another. The devices may be configured to require the user to enter a personal identification number (PIN) before data exchange between a pair of devices can begin in order to, for

example, prevent an unwanted device being substituted for one of the devices 3, 5 and 7 and obtaining or over-writing data from a device within the PAN 1.

In such a PAN 1, if it is desired to add a further device, such as MP3 player 9, it will be necessary to configure separately each of the devices 3, 5, 7 within the PAN 1 to communicate with the MP3 player 9. It will be appreciated that, as the number of devices within the PAN 1 increases, the addition of a new device to the PAN 1 requires an increasing number of configuration steps. For a conventional PAN having  $n$  components,  $n*(n-1)/2$  component associations must be performed to form the PAN.

According to an aspect of the invention a group of devices within a PAN form a PAN Security Domain (PSD). A PSD is a group of components inside a PAN where each component can be authenticated, trusted and securely communicated with by means of some common security association. This reduces the number of component association procedures required.

In a PSD one device has the role of a PSD administrator. This device includes security data (for example a shared key or a public-private key pair) that can be selectively passed to other devices that are to join the PSD. Communication can only successfully occur between devices that have this security data. Once a device has the security data, it can communicate with other devices in the PSD without referring to the PSD administrator. When a device is added to the PSD

the PSD administrator advises each device of the addition of a new device to the PSD. If there are  $n$  devices in the PSD this requires  $n-1$  inter-device communications. It is not necessary for the new device to separately pair or associate itself with each other device in the PSD.

5

The security association could be in the form of a shared secret key or a shared group key based on public key techniques, with a mutual "trust" being established between the devices by a personal certification authority (CA) within the PSD. Certificates issued to all PSD members indicate the device as a member  
10 of that PSD. The group key is not used for secure bilateral communications in the PSD, which takes place using bilaterally established keys (discussed further below). The group key is used only for proof of PSD membership, secure PSD-wide broadcasts and PSD-wide secure communications.

15 The initial decision as to whether a device can be part of a PSD or not will be on user judgement followed up by positive authentication of the device based on a public key infrastructure (PKI) trusted root certificate. Alternatively, another known authentication method could be used.

20 One device within the PSD is nominated as the PSD administrator. The PSD administrator is a role that could be assumed by any of the devices in the PSD provided it contains the necessary hardware to support the role, for example a secure key store and/or a display. The administrator role may be moved from one

device to another. If the administrator role is moved to a new device, the new device will have passed thereto, or have pre-stored thereon, the necessary security data to allow the admission of new devices to the PSD.

- 5 The PSD administrator also is responsible for configuring and managing the policies (described below) governing the devices in the PSD. Additionally it is responsible for enrolling new members in the PSD. The PSD administrator could also contain the personal CA that is responsible for issuing certificates to the PSD members. Advantageously, the PSD administrator will be the device with  
10 the greatest processing power and the best user interface. In a PSD based on the PAN 1 of Figure 1, the administrator is laptop 5.

When a single user owns all devices in a PSD and treats them equally, such a configuration of devices will not contain any restrictions based on the identity of  
15 a device. All shared resources will be made available to all the PSD member devices. In other words, there is group "trust" between the devices. If a device is a member of the PSD, the other devices will assume that the devices can be trusted and communicated with. There is no need for each device to set up an individual trust relationship with each other device, in contrast to a conventional  
20 PAN as described above. Provided that the device is admitted to the group by the PSD administrator, the other devices will assume that the newly-admitted device can be trusted.

Figure 2 illustrates a PAN 11 containing six devices, designated A to F. The devices shown in Figure 2 are all PDAs but it should be understood that they could be other types of device, or a combination of different devices, as in Figure 1. Devices A, B and C are owned by the same user (user 1) while D and E are  
5 owned by another user (user 2). A third user (user 3) owns device F. All these devices are capable of communicating with other using their local interfaces.

A first PSD 13 includes devices A, B and C. These devices will be able to share resources and communicate with each other securely. A second PSD 15 includes  
10 devices D and E. Again, these devices will be able to share resources and communicate with each other securely.

If membership of one PSD is limited to devices, such as devices A, B and C, from a single user, two users will not be able share any resources. Sharing of  
15 resources could be achieved if the existing PSDs are configured so that device sharing between the PSDs is possible.

A more effective and preferred way for the two users to share resources is to establish a new PSD. Depending on the situation, this PSD could be a temporary  
20 or a permanent PSD including the devices with the resources required to be shared.

Figure 3 shows a new PSD 17 formed between devices B, C and E. This will require a security association between two devices belonging to users 1 and 2. This association does not have to be between the very same devices that are going to be part of the new PSD. The original PSD could transmit the necessary data to introduce the new device to the PSD to all its member devices. Alternatively, the users 1 and 2 could pair two devices (one from each user) and then add further devices as required using one of the original devices as the PSD administrator.

When forming a PSD with devices from different users, it is not always straightforward to assign a PSD administrator. It might have to be mutually agreed by all parties in the PSD. Alternatively, the device that initially created the PSD could assume this role. Nevertheless, if required it could be handed over to another device in the PSD.

Each user can then configure their device policies to share the required resources with the members of the newly formed PSD.

User 1 will configure the policy on B and C while user 2 will do the same for E.

Individual devices could contain a number of built in or preset configurations that could be activated by the user for different PSDs.

If required a PSD could also be used to establish different groups within a set of devices owned by the same user.

In addition to the temporary PSD between user 1 and user 2, either of them could establish another PSD to share resources with user 3. In order to keep the PSD concept simple, user 2 cannot use one of his devices, say E to establish a PSD between user 1 and 3, i.e. E cannot bridge the trust between the two different PSDs. Nonetheless, this could be achieved if E used as a PSD administrator to form a PSD involving devices from user 1 and user 3.

10

The formation of a PSD between devices B, C and E, with identities IDB, IDC and IDE respectively, will now be described in more detail, with reference to Figure 4. In order for these devices to form a PSD, two security associations between the three devices are needed. For example, these could be {B, C} and {C, E}. Based on these associations, it is possible for B and C, and C and E to communicate securely. Device C performs the role of PSD administrator. C then generates a group PSD membership key KPSD. C then communicates the identities of all PSD members to each other, i.e. forwards IDB and IDE to E and B respectively. Together with KPSD, B and E are now in a position to generate a further key KBE to allow secure communications between them. Figure 4 of the drawings shows the exchange of data between devices.

20

Alternatively, device C can have the role of a personal CA and issue B and E with certificates to carry out the above key exchanges using a local PKI. The possession of this certificate is equivalent to having access to KPSD, i.e. its proof of membership in the PSD.

5

However, forming a PSD itself does not impose any behaviour patterns or rules on the individual devices themselves. These must be achieved through a suitable “policy”. This policy will set guidelines on behaviour and dictate how resources should be used and how the device should behave under different circumstances.

10

PSD policy can be used to enforce restrictions on any of the following:

- a. Available resources.
- b. Requirements for joining the PSD as a member.
- 15 c. Requirements to assume the role of the PSD administrator.
- d. User interaction.
- e. Usage of chargeable services.
- f. The ability to install new applications.

20 Devices from more than one user may be PSD members.

The PSD policy file is in a standardised format to achieve interoperability between devices and it contains information about the resources available to



different devices depending on the PSD to which they belong. All the resources listed in the file do not have to be available to the PSD all the time. These entries can be for future use when the resource is available to the PSD.

- 5 Each device has its own version of the policy file that states which resources are available from that particular device to the rest of the PSD members. Hence the policy file for two devices with different resource commitments to the PSD will differ. Devices may update or modify this as and when resources are either added to the PSD or removed from the PSD. Alternatively, the device might rely on the
- 10 PSD administrator to do this on the devices behalf.

Depending on the access control mechanism it might be required to the store the policy file locally on a device. Nevertheless it is possible for a device to enquire and obtain policy information from a trusted device. It is not required for this

15 trusted device to be a member of the same PSD.

The significance of each entry in a device policy is explained below.

Resource Type & ID	Target ID	Authorisation ID
GPRS	C	
...	...	...

An Example PSD Policy File

## Resource Type & ID

This contains information about the ID of the resource and its type. The ID is required to uniquely identify the resource within a component. The type of the resource is important when enforcing “Permissions Types” (discussed below) applicable to a resource.

Different resources on a component can be divided into four broad functional areas depending on their impact on the hosting component and its user.

1. Local Services - Printers, projectors, etc.
2. Network Interfaces - GSM, GPRS, BT, IrDA, WLAN, etc., or similar resources related network connectivity
3. Personal Information Management - Calendar, Phonebook, Location information etc., which are of personal value and will have privacy issues associated with them.
4. Executables - refers to code downloaded from another component on to the target device.

The above is merely an example of resources.

## Target ID

Uniquely identifies the component where the resource is located. It is useful to identify resources within the PSD when the resource is available from more than one component in the PSD.

5

## Authorisation ID

PSD members have access to all PSD resources that have been made available by the policy file. If the PSD relies on a PSD administrator, then the Authorisation ID should be the ID of the component assuming the role of the PSD administrator. If the component is to have the autonomy to authorise other components access to its resources, then the Authorisation ID is the same as the Target ID. When there are devices from more than one user, it is likely that the devices will retain the ability to authorise themselves without having to rely on a PSD administrator.

15

Figure 5 shows a device 18 within a PSD 19. The device includes PSD policy instructions (PP) 20, storing the PSD policy data described above.

20 The device 18 has associated therewith resources 22 and 24, which may be useful to other devices 30 and 32 within the PSD 19. For example, if the device is a laptop computer, such resources may be the LCD display and a printer, and, if the device is a mobile telephone, the resources may be SMS

transmission/reception and the personal telephone book stored on the mobile telephone. It should, of course, be understood that these are merely examples of devices and resources.

- 5 The device 18 also includes component policy instructions (CP) 26. These instructions control the allocation of resources 20, 24 to local requests, i.e. requests from the device 18 itself. These instructions control use of local resources in a generally conventional manner, and have a very similar function to the security policy used in the MIDP 2.0 standard.

10

- The device 18 further includes component PSD profile instructions (CPP) 28. These instructions control the use of resources 22 and 24 by the other devices 30 and 32 in the PSD 19. If the device 18 is a member of more than one PSD, it will have more than one set of PSD policy instructions and more than one set of  
15 component PSD profile instructions. However, for the sake of simplicity, in the present example, the device 18 is a member of only one PSD, PSD 19.

- It will generally be desired that (although the invention is not so restricted) any restrictions in the component policy instructions 26 to use of resources 20, 24 in  
20 response to local requests will also be applied to requests of other members 30, 32 of the PSD 19. Therefore, the component PSD policy instructions 28 will include the restrictions of the component policy instructions 26.

In addition, typically the component PSD profile 28 will impose further restrictions on use of the resources 20, 24 by the other devices 30, 32 of the PSD 19. For example, if the device 18 is a GPRS mobile terminal, the component PSD profile may allow the mobile terminal to be used as a modem for downloading data to the devices 30, 32, but may restrict the maximum quantity of downloaded data to 500 KB in any given period – for example 24 hours. If further requests for data downloading are received from the devices 30, 32, the component PSD profile 28 may be configured such that the user of the device 18 receives a (visual and/or audio) prompt from the mobile terminal indicating that a further request for data download has been made, seeking authorisation from the user of the device 18 for this further data download. For example, the component PSD profile 28 may also allow access to the personal telephone book stored on the mobile terminal, but may not permit access to the SMS messages stored on the mobile terminal.

15

It should be understood that these are merely examples of resource sharing. The component PSD profile 28 can be configured to prohibit or allow sharing of any resources provided by the device 18. The component PSD profile 28 will also set any limitations on use of resources – such as limiting the amount of use or requiring a user prompt for authorisation of resource use. Of course, components 30 and 32 will include their own resources that may be shared by device 18 within the PSD 19, and will include PSD policy instructions, component policy

instructions and component PSD profile instructions. However, these are not shown in Figure 5, for the sake of simplicity.

The arrangement of the device 18 is shown in more detail in Figure 6. A security framework 34 controls access, via operating system 36, to resources 22 and 24. The security framework includes first input port 38 which receives local requests (i.e. requests by the device 18) for use of resources 22 and 24. On receipt of such a request, the security framework 34 interrogates the component policy instructions 26 to determine the allowability of the resource request. If the resource request is allowed, or conditionally allowed, the resource request, with the appropriate conditions, is passed to operating a system 36, which allows the appropriate usage of the resources 22, 24.

The security framework 34 also includes input port 40 for receiving resource requests from other devices 30, 32 within the PSD 19. The procedure on receipt of their request for use of a resource 26, 25, from another device will be described further below in relation to Figure 7.

The security framework 34 further includes an output port 42 for passing requests for use of external resources to other devices 30,32 within the PSD 19. The operation of the PSD 19 with respect to such a request will be understood from the following discussion in relation to Figure 7.

Figure 7 shows the operation of the PSD 19 when device 30 wishes to make use of resource 22 of device 18. As is shown in Figure 7, device 30 includes a structure similar to claim 18 for dealing with resource sharing within the PSD 19.

In Figure 7 elements of device 30 which correspond to similar elements of device 18 are designated the with same reference number suffixed with "A".

In the Figure 7 example, device 18 is a laptop computer and resource 22 is a printer. Device 30 is a mobile telephone and resource 24A is a store of SMS messages. The user of device 30 wishes to print an SMS message from store 24A.

The operating system 36A of device 30 passes the relevant SMS to security framework 34A together with a message that it is desired to print the SMS message. The security framework 34A consults the PSD policy instructions 20A, which includes a list of resources available within the PSD 19. In the examples shown, the PSD policy instructions 20A will indicate that device 18 includes printer resource 22. The SMS message, together with instructions to print this message are passed to device 18 via output port 42A of device 30 and input port 40 of device 18. This data will be encoded in the manner described above, using the key as described.

The security framework 34 of device 18 decodes the received data at port 40. The security framework 34 then consults component PSD profile instructions 26

to determine whether the resource request should be allowed. If the resource request is allowed, the request is passed to the resource (printer) 22 via operating system 36.

- 5 Each device within a PSD may be equally trusted, i.e. all devices within a PSD will have access to the same information and resources. Alternatively, devices within a PSD may have different “privileges”, that is one device may be able to access information and resources that another device within the PSD is prevented from accessing. For example, a PSD may include two personal computers, PC A  
10 and PC B. These personal computers could be configured so that only PC A has access to the PSD user’s e-mails (which could be stored on PC A or elsewhere). Such restrictions (or privileges) to the access of information within the PSD could be held on the policy file for that PSD). It is preferred that the restrictions or privileges can be changed within a PSD, as required. This will typically be  
15 performed under control of the PSD administrator.

The advantages of a PSD include:

- \* It is not necessary for a new PSD member to share security associations with all existing PSD members to establish trusted communications with  
20 them. For example, if device D joins an existing PSD of A, B and C, which is defined by group key, KABC. Once D has been authenticated by A (the PSD administrator), and a bilateral communication key KAD established, A can send KABC to D under the protection of key KAD. D



can then prove PSD membership with this and establish further bilateral secure communication keys with B and C.

- \* Reduction in the user interaction required as the number of imprinting events is reduced. For a PSD of  $n$  components, only  $n-1$  imprinting sessions are necessary, compared to  $n(n-1)/2$  in a conventional PAN without the PSD concept
- \* Use of the device with the best user interface for the PSD administrator for enrolling new members allows the most user friendly imprinting protocols to always be used
- 10 \* Use of a PSD administrator with revocation checking facilities allows revocation checks to be performed when new devices with certificates are enrolled
- \* Consistent resource information across all devices
- \* Resources can be shared with other users without having to compromise interactions between one's own devices
- 15 \* Designation of group roles:
  - o Designation of a single device to perform the role of a gateway between all PSD devices and external devices.
  - o Designation of devices to perform specialised tasks, for example calendar synchronisation, revocation checking
- 20 \* Use of the shared security associations to perform secure broadcast
- \* A device can be nominated by the user to perform administrative tasks on his behalf, i.e. the PSD administrator

- \* Establishes another layer of security on top of link layer security
- \* Different PSDs can be created for different trust groups within a PAN to solve particular access control problems.

- 5 The PSD concept described above is applicable to networks other than PANs. The devices in the network (and domain) may be separated by large distances.

Devices could be manufactured or pre-configured to enrol in certain PSDs automatically. For example, a mobile telephone could be configured so that

10 when it comes within communication range of a particular PSD it automatically enrolls in that PSD. Where such automatic enrolment is provided, generally the exchange of data between devices in the PSD will be restricted to prevent private information being disclosed to other devices in the PSD.

- 15 For example, a PSD could be arranged by a train operating company that automatically enrolled appropriately programmed mobile telephones at a station so that train running information can be transmitted to the telephone for use by the user.

## CLAIMS

1. A network including a plurality of devices, each device being capable of wireless communication with the other devices of the network, and wherein one of the devices includes administration means for allowing selected devices to be associated within a domain by providing each device with identification data, the identification data of each device being interpretable by each other device within the domain, particular modes of communication only being allowed between devices within the domain having such identification data.
2. The network of claim 1, wherein the identification data received from the administration means includes a key.
3. The network of claim 2, wherein the key is a shared key.
4. The network of claim 2, wherein the key is a public key of a public-private key pair, the private key being stored on the administration means.
5. The network of any one of claims 1 to 4, wherein each device has a security certificate associated therewith indicating its membership of the domain.
6. The network of any one of claims 2 to 5, including further keys for allowing encrypted communication between the devices within the domain.

7. The network of any one of claims 1 to 6, wherein the administration means transmits to each device within the domain data indicative of the characteristics of the other devices within the domain.

5

8. The network of any one of claims 1 to 7, wherein the administration means is transferable from one device to another.

9. The network of any one of claims 1 to 7, wherein a plurality of devices within the domain include administration means, and means is provided to selectively enable only one of said administration means at a time.

10. The network of any one of claims 1 to 9, including a plurality of said domains.

15

11. The network of claim 10, wherein a device is associated with each of said plurality of domains.

12. The network of any one of the preceding claims, wherein at least one of the devices within the domain includes resources usable by other devices within the domain, and wherein control means is provided for controlling use of said resources by the said other devices.

20

13. The network of claim 12, wherein the control means limits access by said other devices to only selected ones of said resources.

14. The network of claim 12 or 13, wherein the control means limits the amount of use by said other devices to said resources.

15. The network of claim 12, 13 or 14, wherein the control means prompts the operator of the device making resources available to authorise use of said resources by said other devices when a request for use of said resources is received therefrom.

16. A network substantially as hereinbefore described and/or substantially as illustrated in any one of or any combination of the accompanying drawings.

17. A method allowing selected devices within a network to be associated within a domain, each device being capable of wireless communication with the other devices of the domain, the method including adapting one device within the domain to provide each other device with identification data, the identification data of each device being interpretable by each other device within the domain, particular modes of communication only being allowed between devices within the domain having such identification data.

18. The method of claim 13, wherein the identification data includes a key.

19. The method of claim 14, wherein the key is a shared key.
20. The method of claim 14, wherein the key is a public key of a public-private key pair, the private key being stored on the adapted device.
21. The method of any one of claims 13 to 16, wherein each device has a security certificate associated therewith indicating its membership of the domain.
22. The method of any one of claims 14 to 17, including providing further keys for allowing encrypted communication between the devices within the domain.
23. The method of any one of claims 13 to 18, wherein the adapted device transmits to each device within the domain data indicative of the characteristics of the other devices within the domain.
24. The method of any one of claims 13 to 19, including changing the device within the domain which provides each other device with identification data.
25. The method of any one of claims 13 to 20, including allowing the formation of a plurality of said domains.

26. The method of claim 21, wherein a device is associated with each of said plurality of domains.

27. The method of any one of claim 17 to 26, in which at least one of the devices within the domain includes resources usable by other devices in the domain, wherein use of said resources by other devices is controlled.

28. The method of claim 27, wherein the control step limits access by said other devices to only selected ones of said resources.

10

29. The method of claim 27 or 28, wherein the control step limits the amount of use by said other devices of said resources.

30. The method of claim 27, 28 or 29, wherein the control step prompts the operator of the device making resources available to authorise use of said resources by said other devices when a request for use of said resources is received therefrom.

31. A method substantially as hereinbefore described and/or substantially as illustrated in any one of or any combination of the accompanying drawings.

20

## ABSTRACT

NETWORKS

5      A network 11 including a plurality of devices A...F, each device being  
capable of wireless communication with the other devices of the network.  
One of the devices C includes administration means for allowing selected  
devices A,B,C to be associated within a domain 13 by providing each device  
A,B,C with identification data, the identification data of each device being  
10      interpretable by each other device within the domain, communication only  
being allowed between devices within the domain having such identification  
data. Controlled resource sharing between devices is permitted.

15      [ Figure 3 ]



1/7

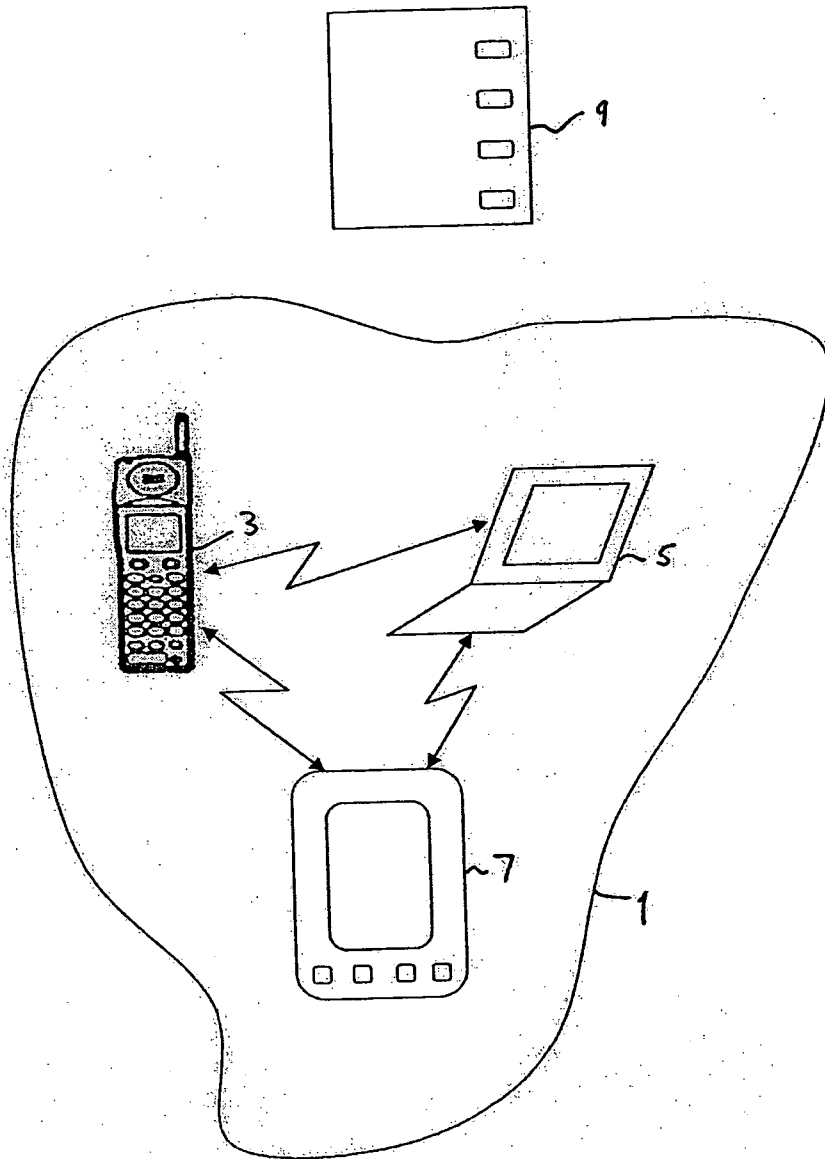


Figure 1

2/7

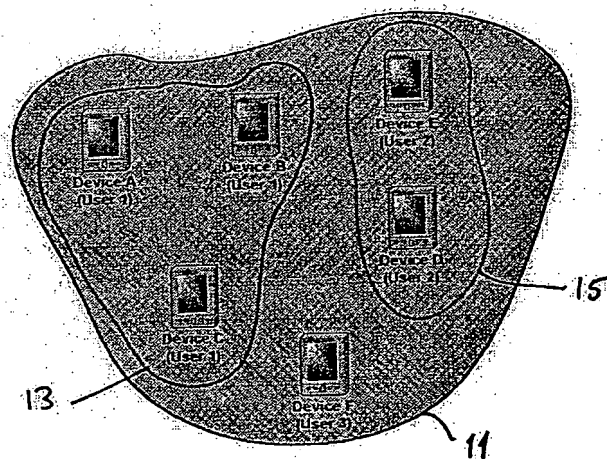


Figure 2

3/7

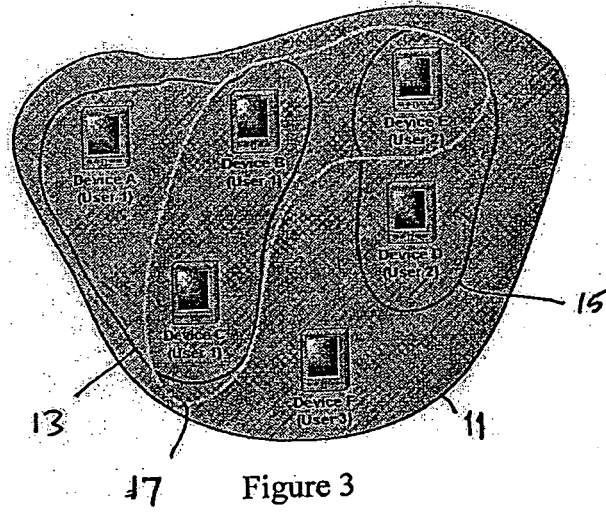


Figure 3

4/7

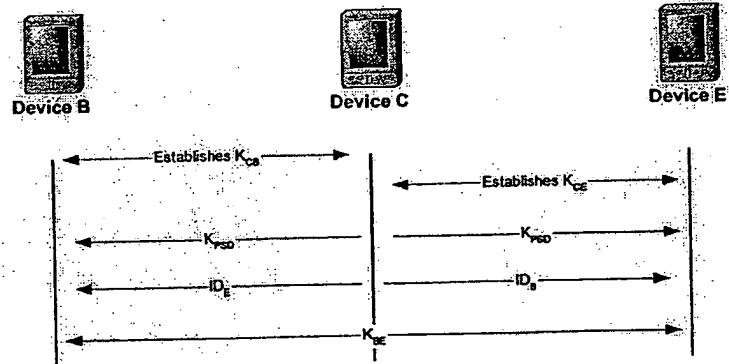


Figure 4

5/7

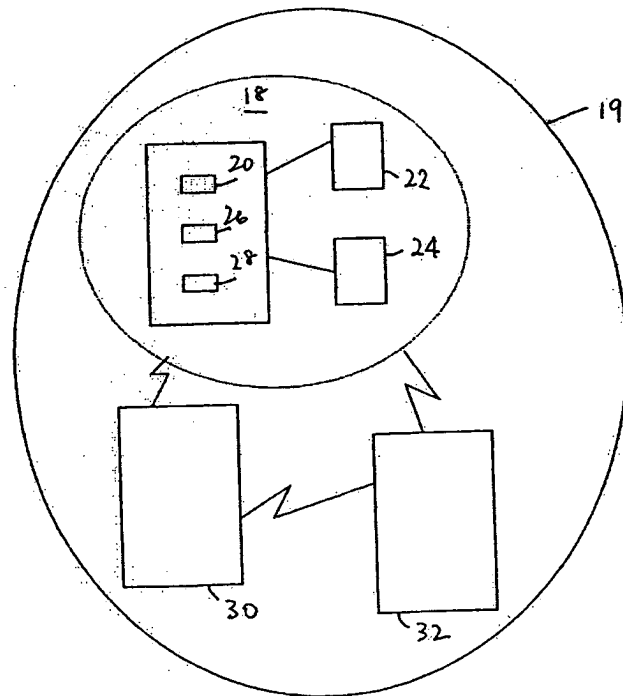


FIG. 5

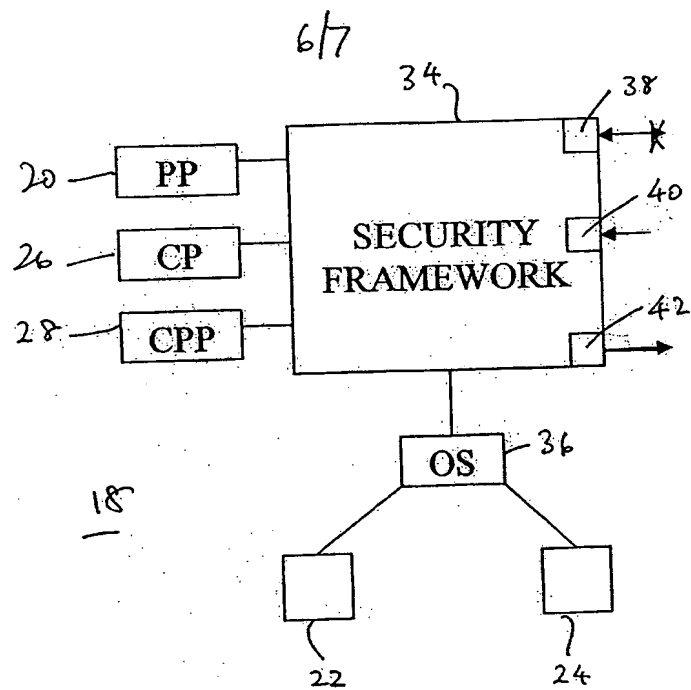


FIG. 6

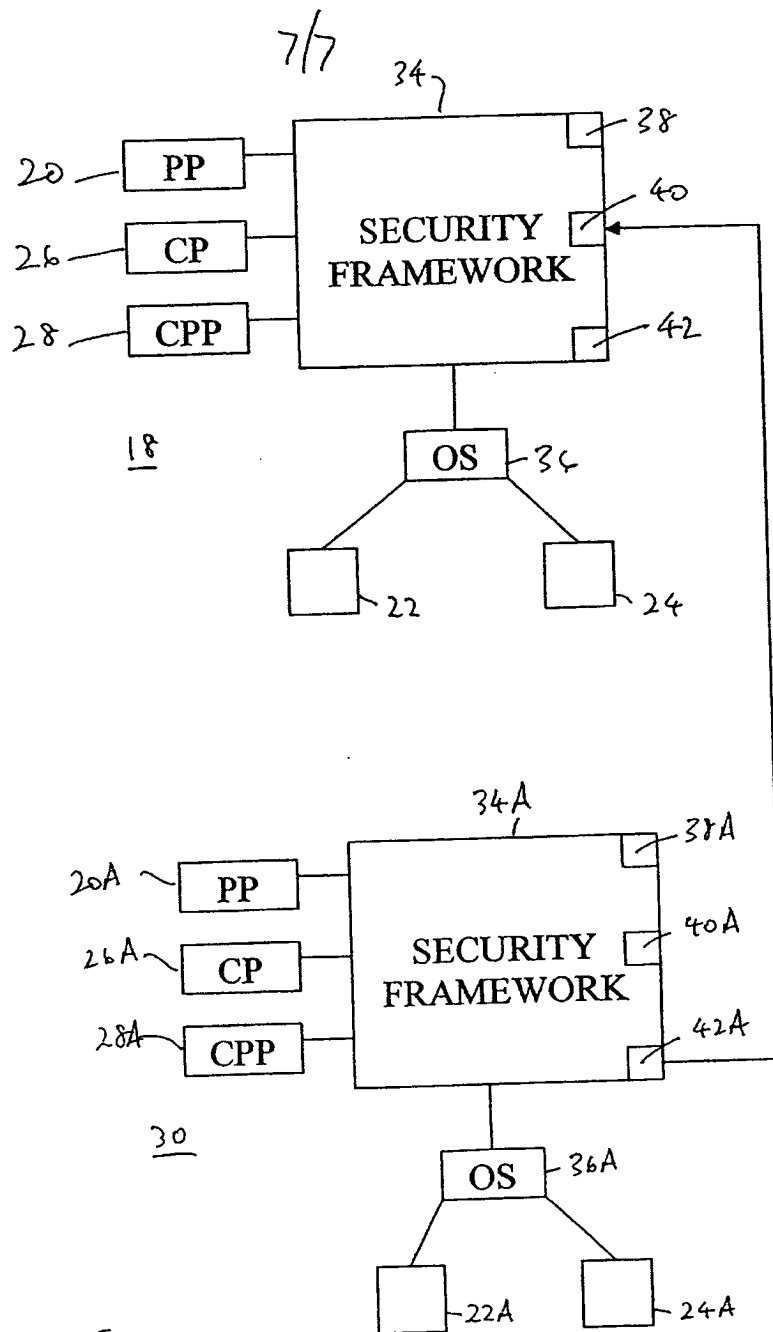


FIG. 7

REGISTER ENTRY FOR GB2389743

Form 1 Application No GB0220463.4 filing date 03.09.2002

Priority claimed:

13.06.2002 in United Kingdom - doc: 0213609

Title NETWORKS

Applicant/Proprietor

VODAFONE GROUP PLC, Incorporated in the United Kingdom, The Courtyard, 2-4  
London Road, NEWBURY, Berkshire, RG14 1JX, United Kingdom

[ADP No. 08154718001]

Inventors

BULENT OZGUR GURLEYEN, 35 Greys Court, Sidmouth Street, READING,  
Berkshire, RG1 4PP, United Kingdom

[ADP No. 08402398001]

PUBUDU PRIYANJAYA CHANRASIRI, 34 Richmond Avenue, THATCHAM, Berkshire,  
RG19 3UG, United Kingdom

[ADP No. 08268484002]

Classified to

H4L

H04Q

Address for Service

MATHISEN MACARA & CO, The Coach House, 6-8 Swakeleys Road, Ickenham,  
UXBRIDGE, Middlesex, UB10 8BZ, United Kingdom

[ADP No. 00001073001]

Publication No GB2389743 dated 17.12.2003

Examination requested 14.05.2004

---

12.05.2003 Notification of change of Applicant/Proprietor address of  
VODAFONE GROUP PLC, Incorporated in the United Kingdom, The  
Courtyard, 2-4 London Road, NEWBURY, Berkshire, RG14 1JX, United  
Kingdom [ADP No. 08154718001]  
to  
VODAFONE GROUP PLC, Incorporated in the United Kingdom, Vodafone  
House, The Connection, NEWBURY, Berkshire, RG14 2FN, United Kingdom  
[ADP No. 08588287001]  
dated 08.05.2003. Written notification filed on GB0305894.8  
Entry Type 7.3 Staff ID. ASPR Auth ID. F20

\*\*\*\* END OF REGISTER ENTRY \*\*\*\*